


Group component

Administrators can define 'groups' that are used for attaching single users or user groups.

A group can be granted or denied access to hierarchical item nodes, services and functionalities in a application domain.

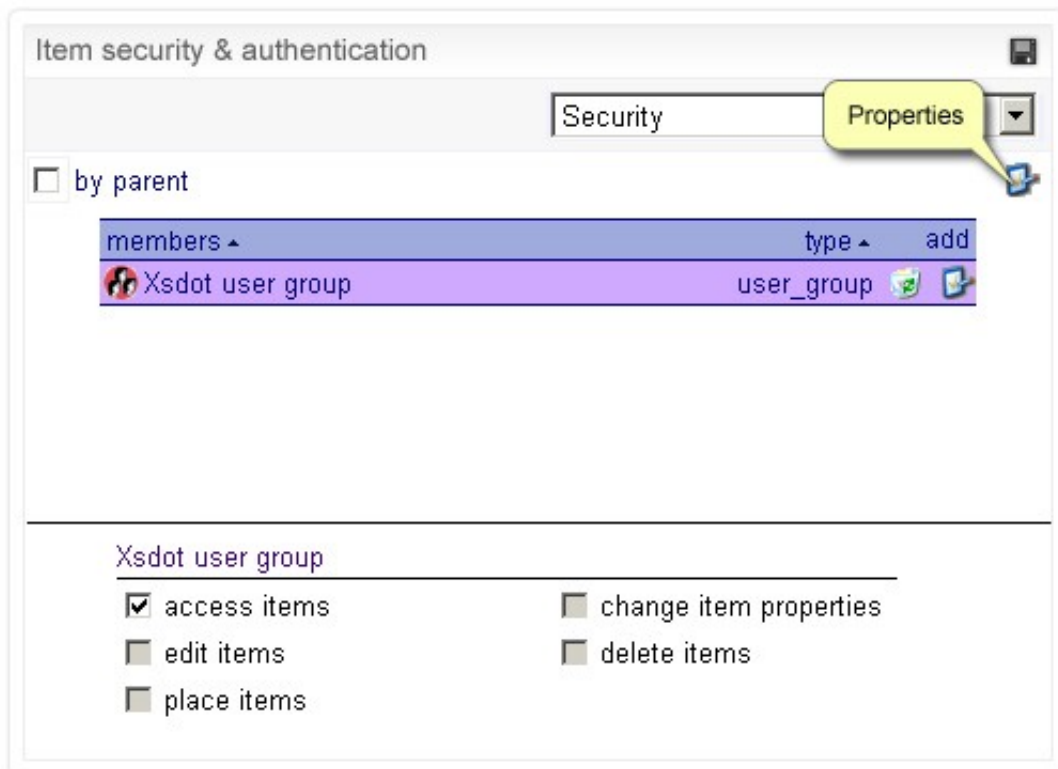

Item security & authentication

Security Properties

by parent

members ▾	type ▾	add
Xsdot user group	user_group	

Xsdot user group

- access items
- edit items
- place items
- change item properties
- delete items